


FLAIR HEATING EQUIPMENT



Trim-Line Pac PACKAGED ZONING

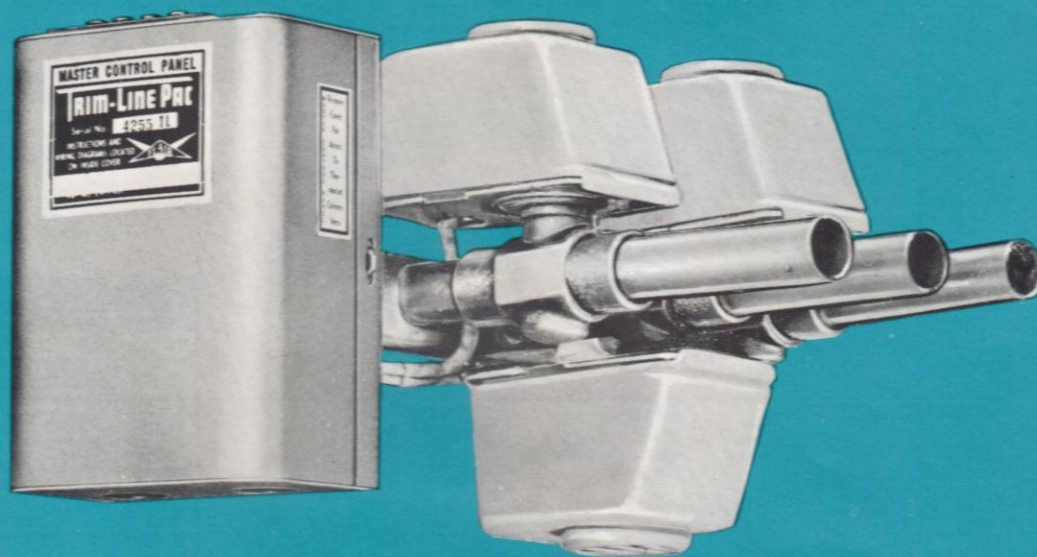


Trim-Line Pac is completely wired ● Trim-Line Pac is completely assembled ●
Trim-Line Pac is absolutely trouble-free ● Trim-Line Pac IS packaged zoning.

A COMPLETELY ASSEMBLED
WIRED and TESTED

ZONE CONTROL PACKAGE




AVAILABLE FOR 2, 3, 4, 5 OR 6 ZONES
CONNECTING THE THERMOSTATS IS THE ONLY WIRING REQUIRED
READY FOR INSTANT INSTALLATION

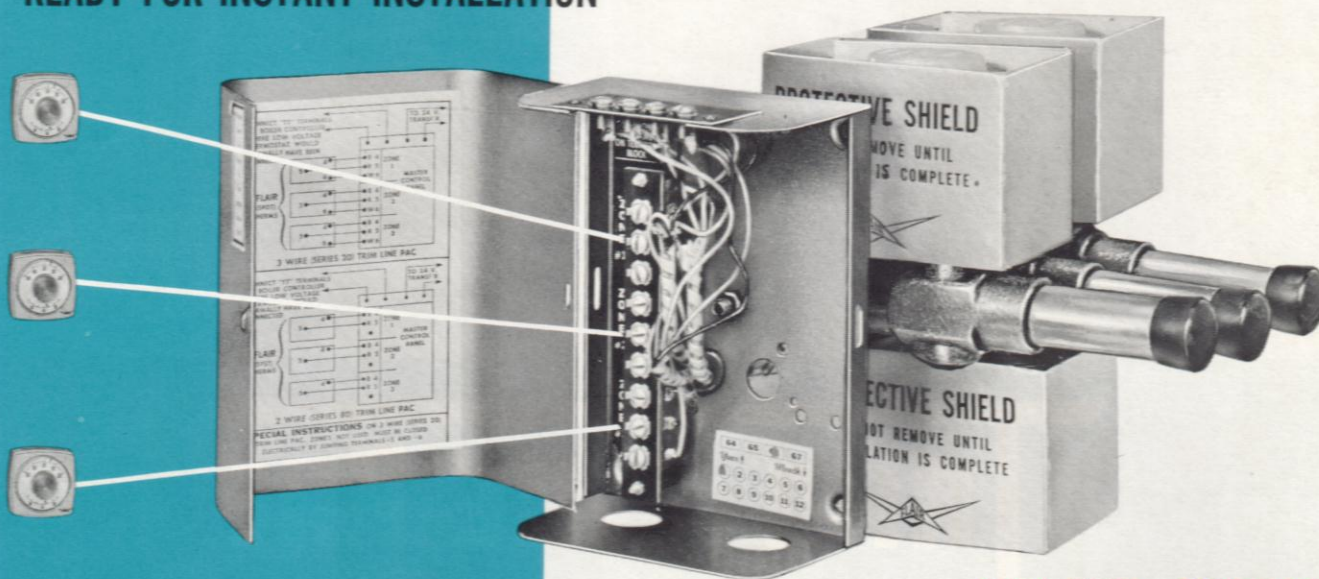

SAVE TIME SAVE LABOR

The Trim-Line Pac eliminates piping and boiler room labor—all major connections have already been made on a factory assembly line. Each Trim-Line Pac is tested electrically and hydrostatically before shipment and is guaranteed for eighteen months. The Trim-Line Pac is shipped completely assembled, wired, and ready to install.

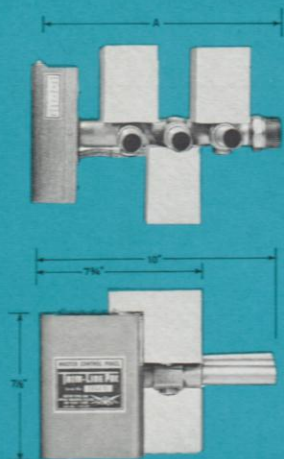

TRIM LINE PAC Units are available for 2, 3, 4, 5, or 6 zone installations, and are furnished complete with power transformer, Thermostats, 3/4" or 1" Zone-A-Trol Valves, Connector Tubes, and 1 1/4" "Type K" copper manifold for sweat connection.



Shown above with Flexamatic tank Purger vent combination.

MODEL NUMBER		NUMBER OF ZONES	DIMENSIONS A
2 Wire	3 Wire		
ZB3A2	ZB3AO	2	9"
ZC3A2	ZC3AO	3	11"
ZD3A2	ZD3AO	4	13"
ZE3A2	ZE3AO	5	15"
ZF3A2	ZF3AO	6	17"

ALL TRIM LINE PACS are equipped with 2 or 3 Wire Valves as requested and are furnished with matching 2 or 3 Wire Thermostats.



FLAIR MANUFACTURING CORP.
HAUPPAUGE, L.I. NEW YORK 11787 • 516-234-3600

DISTRIBUTED BY

LITHO IN U.S.A.

Bulletin No. B-1704
Supersedes No. B-1703